

Kitemark™ Certificate

This is to certify that:

Rehau Limited
Hill Court
Walford
Ross-on-Wye
HR9 5QN
United Kingdom

Holds Certificate Number:

KM 66461


In respect of:

BS EN 12608 / PAS24
PVCU Profile - Enhanced Security Doors System Supplier

This issues the right and licence to use the Kitemark in accordance with the Kitemark Terms and Conditions governing the use of the Kitemark, as may be updated from time to time by BSI Assurance UK Ltd (the "Conditions"). All defined terms in this Certificate shall have the same meaning as in the Conditions.

The use of the Kitemark is authorized in respect of the Product(s) detailed on this Certificate provided at or from the above address.

For and on behalf of BSI:

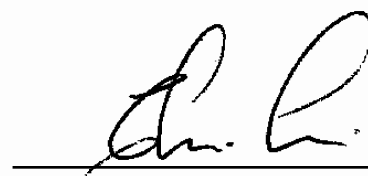

Chris Lewis - Certification Director, Product Certification

First Issued: 2005-07-07

Latest Issue: 2018-03-08

Effective Date: 2018-03-08

Expiry Date: 2021-03-07



Page: 1 of 3

...making excellence a habit.™

Kitemark™ Certificate

No. KM 66461

BS EN 12608:2016 / PAS 24:2016 - General and enhanced security performance requirements for door assemblies

This Licence covers the following residential door system design specification. Only those components that have been approved in accordance with the Kitemark scheme requirements can be incorporated within the system(s) detailed.

Total 70 and AGILA PVC-U Door System

Fabricated and installed in accordance with the latest issue of the following REHAU Limited manual(s):
Total 70 Door System Manual

System description:

The door assemblies are Single Double or sliding (upto 4) leaves, open in or out or horizontally sliding, hinged on outer frame where applicable, internally beaded with BS EN 1279-2 compliant IGU(s), laminated on one pane to class P1A, or panelled infill(s), with or without welded or mechanically fixed midrails (either glass/midrail/glass or full glass), with either standard or mechanically fixed low threshold and of otherwise fully welded construction. With or without letterplate which meets the requirements of TS008 Enhanced Security Grade 2 Fitted with either Winkhaus AV2; or Cobra, Yale Mantis or Millenco, DGS Elite, Maco CTS or Greenteq locking with either SFS Dynamic 2D or 3D Series, DGS Elite, Greenteq Pin, Yale Flag Hinge, Mila Evolution or Pro Secure, or Trojan lift hinges. Rehau branded Sliding Door Hardware With handle and cylinder combination to achieve a total of 3* minimum. Doors are classified as D.

Size Limitations and Performance Characteristics

Door Type	Length (mm) - Maximum	Height (mm) - Maximum (including sill)	Air Permeability classification	Watertightness classification	Resistance to Wind classification	Exposure category as given in Table 1 of BS 6375-1:2009 (except *)
Sash dimensions for hinged doors with approved outer frame and sash profiles:						
Single leaf Open Out	1000	2200	4	3A	A2	1200
Single leaf/Double Leaf Open In Standard Threshold	1000/1900	2200	4	8A	A3	1200
Single leaf/Double Leaf Open In Low Threshold	1000/1900	2200	4	3A	A3	1200
Single leaf/Double Leaf Open In Standard Threshold	1000/1900	2200	4	8A	A3	1200
Sash dimensions for sliding doors with approved outer frame and sash profiles:						
Maximum single leaf size	1200	2100	4	7A	C3	1200

First Issued: 2005-07-07

Latest Issue: 2018-03-08

Effective Date: 2018-03-08

Expiry Date: 2021-03-07

Page: 2 of 3

This certificate has been issued by and remains the property of BSI Assurance UK Ltd, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PP, United Kingdom and should be returned immediately upon request.
To check its validity telephone +44 (0) 345 080 9000. An electronic certificate can be authenticated [online](#).

Kitemark™ Certificate

No. KM 66461

BS EN 12608:2016 / PAS 24:2016 - General and enhanced security performance requirements for door assemblies

This Licence covers the following residential door system design specification. Only those components that have been approved in accordance with the Kitemark scheme requirements can be incorporated within the system(s) detailed.

REHAU Limited Tritec PVC-U Residential Door System

Fabricated and installed in accordance with the latest issue of the following REHAU Limited manual(s): Tritec 60mm Door System Manufacturing Specification

System description:

The door assemblies are Single leaf, open in or open out, hinged on outer frame, internally beaded with BS EN 1279-2 compliant IGU(s), laminated on one pane or panelled infill(s), with or without welded or mechanically fixed midrails (either glass/midrail/panel, panel/midrail/panel, glass/midrail/glass, full panel or full glass), with either standard or mechanically fixed low threshold and of otherwise fully welded construction. Fitted with Winkhaus locking espagnolette locking system and SFS Hinges and are classified as D K.

Size Limitations and Performance Characteristics

Door Type	Length (mm) - Maximum	Height (mm) - Maximum (including sill)	Air Permeability classification	Watertightness classification	Resistance to Wind classification	Exposure category as given in Table 1 of BS 6375-1:2009 (except *)
Sash dimensions for doors with approved outer frame and sash profiles:						
Single leaf Open Out	1000	2200	-	-	-	1200 Special*
Single leaf Open In	1000	2200	-	-	-	800*

First Issued: 2005-07-07

Latest Issue: 2018-03-08

Effective Date: 2018-03-08

Expiry Date: 2021-03-07

Page: 3 of 3

This certificate has been issued by and remains the property of BSI Assurance UK Ltd, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PP, United Kingdom and should be returned immediately upon request.
To check its validity telephone +44 (0) 345 080 9000. An electronic certificate can be authenticated [online](#).